

DATA SHEET



USB-C Hub with USB-A, USB-C and Power Delivery

Transmit data to a USB-C device while simultaneously charging the device

OVERVIEW

The USB-C Hub with USB-A, USB-C and Power Delivery expands USB capabilities by providing two USB-A ports and two USB-C ports for connecting peripherals to a single USB-C port. This hub connects to a USB-C or Thunderbolt 3 enabled laptop, tablet, or desktop computer and features USB-C power delivery, making it ideal for charging mobile devices or transferring data while in the office or on the road.

Convenience

Small, lightweight and portable, the hub is easily stored in a laptop case or pocket. With a transfer rate up to 5Gbps, it is fully USB 3.0 (USB 3.1 Gen 1) compliant, backwards compatible with USB 2.0 and USB 1.1 devices, and supports all USB peripherals, including keyboards and mice, smartphones, tablets, and other USB devices.

Performance

Deliver up to 100W of charging power to the connected device and transfer data up to 5Gbps when connected to the USB-C or USB-A ports.

FEATURES

- Two USB-A ports supporting 5Gbps data transmission
- One USB-C port supporting 5Gbps data transmission
- One USB-C port supporting 5Gbps data downstream and a max 100W power delivery upstream for charging
- Compatible with USB-C and Thunderbolt™ 3 ports
- Reversible, symmetrical USB-C connector
- Small form factor for portability

ITEM DESCRIPTION

82115 USB-C Hub with USB-A, USB-C and Power Delivery

DATA SHEET

SPECIFICATIONS:

USB-C Hub with USB-A, USB-C and Power Delivery

ELECTRICAL SPECIFICATIONS:


- USB-C Power Delivery: 100W max
- 1.6A max output for 2 USB-A & 1 USB-C downstream ports when USB-C PD Power Adapter connected
- Max output depends on host when USB-C PD Power Adapter is not connected

PHYSICAL CHARACTERISTICS:

- Dimensions (HxWxL): 15.5mmH x 90mmW x 60mmL
(0.61 inch H x 3.54 inch W x 2.36 inch L)
- Cable Dimensions (HxWxL): 6.5mmH x 12.35mmW x 166mmL
(0.26 inch H x 0.49 inch W x 6.54 inch L)
- Certifications: FCC, CE

PHYSICAL SPECIFICATIONS:

- Operating Temperature: 0°C to 45°C
- Storage Temperature: -10°C to 70°C
- Operating Humidity: 10% to 85% RH
- Storage Humidity: 5% to 90% RH

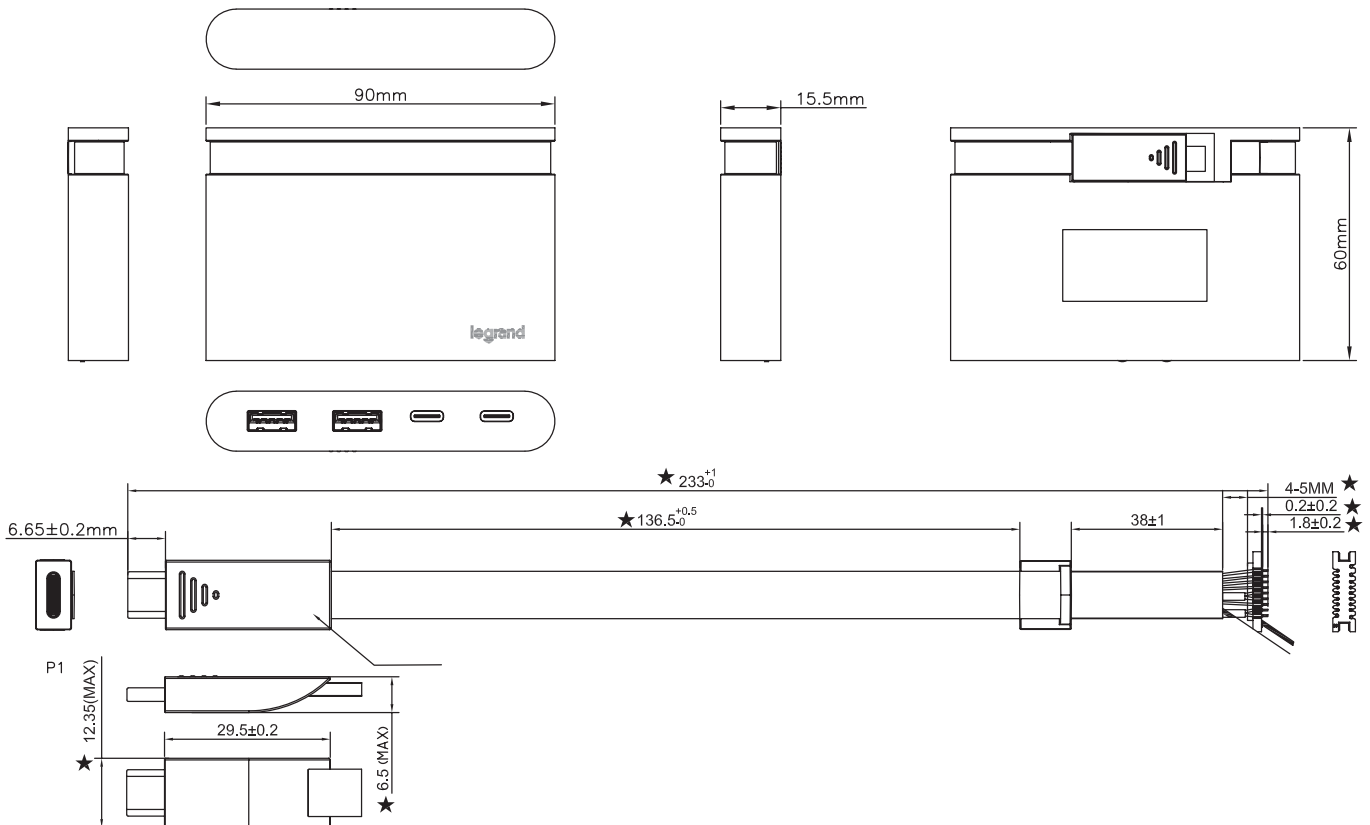

C2G[®]
A brand of **legrand**

Great King Street North
Birmingham, West Midlands B19 2LF
UK Phone (0)800 328 2916
EMEA Phone +44 (0)1952 677300
www.c2g.com/uk

Follow Us

